

Development of a GEM-TPC prototype

Heinz Angerer¹, Reinhard Beck³, Martin Berger^{*}, Felix Böhmer¹
 K. -T. Brinkmann³, Paul Bühler⁴, Michael Carnegie⁴, Sverre Dørheim¹,
 Laura Fabbietti⁵, Chr. Funke³, F. Cusanno⁵, Jörg Hehner², Andreas Heinz²,
 Markus Henske², Christian Höppner¹, David Kaiser³, Bernhard Ketzer¹,
 Igor Konorov¹, Jochen Kunkel², Michael Lang³, Johann Marton⁴,
 Sebastian Neubert¹, Stephan Paul¹, Alexander Schmah⁵, Christian Schmidt²,
 Roman Schmitz³, Sandra Schwab², Daniel Soyk², Ken Suzuki⁴, Ulrike Thoma³,
 Maxence Vandenbroucke¹, Bernd Voss², Dieter Walter³, Quirin Weitzel¹,
 Eberhard Widmann⁴, Alexander Winnebeck³, Lisa Wörner¹, H. -G. Zaunick³,
 Xiaodong Zhang¹ and Johann Zmeskal⁴

¹ Technische Universität München, Physik Department E18, Garching, Germany

² Gesellschaft für Schwerionenforschung mbH, Darmstadt, Germany

³ Helmholtz-Institut für Strahlen- und Kernphysik, Bonn, Germany

⁴ Stefan-Meyer-Institut für subatomare Physik, Vienna, Austria

⁵ Technische Universität München, Excellence Cluster “Universe”, Garching, Germany

*Technische Universität München, Excellence Cluster “Universe”,
 Garching, Germany 85748, Bavaria*

** E-mail: mberger@ph.tum.de*

www.universe-cluster.de

The use of GEM foils for the amplification stage of a TPC instead of a conventional MWPC allows one to bypass the necessity of gating, as the backdrift is suppressed thanks to the asymmetric field configuration. This way, a novel continuously running TPC, which represents one option for the PANDA central tracker, can be realized. A medium sized prototype with a diameter of 300 mm and a length of 600 mm will be tested inside the FOPI spectrometer at GSI using a carbon or lithium beam at intermediate energies ($E = 1\text{--}3\text{ AGeV}$). This detector test under realistic experimental conditions should allow us to verify the spatial resolution for single tracks and the reconstruction capability for displaced vertexes. A series of physics measurement implying pion beams is scheduled with the FOPI spectrometer together with the GEM-TPC as well.

Keywords: GEM; TPC; $\bar{\text{P}}\text{ANDA}$

1. Introduction

To face the challenges of the physics program in $\bar{\text{P}}\text{ANDA}$ (Antiproton Annihilations at Darmstadt), the cylindrical central tracker of the Target Spectrometer (TS) has to fulfill the following requirements¹: multiple

track identification (up to 1000 tracks superimposed inside the TPC all the time), high spatial resolution ($\sigma_{r\varphi} \approx 150 \mu m$, $\sigma_z \approx 1 mm$), high momentum resolution ($\approx 1\%$), minimal material budget ($\approx 1\%$ of radiation length), high rate capability, resistance against aging, etc. Due to the beam characteristics, the TPC has to work in a continuous mode, i.e. without gating, which is another big challenge from the technical point of view.

A Time Projecting Chamber (TPC) with Gas Electron Multiplier (GEM) Readout not only fulfills all the requirements above, it furthermore provides very good dE/dx measurements also in the region of low momenta, which is very useful for particle identification.

In addition, the successful commissioning of the GEM-Detectors for the COMPASS (Common Muon and Proton Apparatus for Structure and Spectroscopy) experiment² shows, that this kind of detector has excellent properties concerning high rate capability and intrinsic suppression of ion backflow. Such properties enables a GEM based TPC to operate in an ungated mode. In the next sections the actual development state, the progress and test results of a GEM-TPC prototype developed by our group will be discussed in detail.

2. Test results of 80 mm test chamber

A first 80 mm GEM-TPC test chamber has been build and tested in the laboratory with PASA/ALTRO³ (10 MHz sampling rate) electronics using cosmic muons. It had a rectangular readout padplane with a pad size of 0.8 mm x 1.0 mm and a pitch of 1.0 mm x 1.2 mm. For details see Ref.⁴ Here only the spatial resolution along the short side of the rectangular pads are shown (see Fig. 1). From this figure one can see that the average spatial

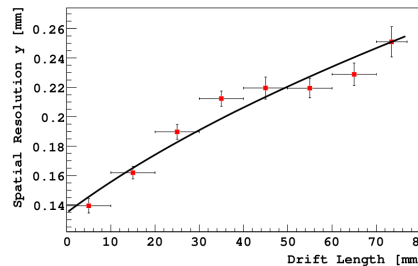


Fig. 1. The y-Axis resolution in dependency of the drift length. Red squares indicate the resolution along the y-Axis (short side of the pads). The black curve is a fit, taking diffusion into account.

resolution along the short side of the pads is about $200\mu\text{m}$. The Gas mixture used for this experiment was Ar/CO₂ (70/30).

3. Upgrade of the test chamber

Since the charge distribution of rectangular pads is not homogeneous, due to the different distances between diagonal and direct neighboring pads, it has been decided to use hexagonal pads for the readout padplane. Simulations have shown that the spatial resolution saturates for a pad-radius smaller than 1.5mm, due mainly to diffusion effects. To validate this result, the new padplane for the test chamber has been equipped with pads in two different sizes, namely 1.5 mm and 1.25 mm. Furthermore the PASA/ALTRO based readout has been replaced by an AFTER based readout. This AFTER chip can be operated with 20 MHz sampling rate and has much lower noise ($\approx 800 e^-$) than the PASA/ALTRO chip ($\approx 1900 e^-$).

4. Test setup at ELSA

A beam telescope was set up at the ELSA accelerator facility to perform a first test of the GEM-TPC prototype with a low intensity electron beam ($E_{beam} \approx 500 \text{ MeV}$) This telescope consists of two GEM-Detectors, four silicon strip detectors and four scintillators for triggering. During the first tests this beam telescope has been commissioned. The spatial resolutions of the reference detectors, which can be achieved at the moment, are shown in table 4. The measured beam profile can be seen in Fig. 2.

Detector	GEM 1	GEM 2	Silicon 1	Silicon 2
Y-Resolution [μm]	100	150	5	5
X-Resolution [μm]	200	250	10	10

5. First tests

During the first test it was possible to obtain first electron tracks inside the test chamber (see Fig. 3).

For a second test the firmware of the readout electronics was updated and a full 2D beam profile was observed. Besides, the noise of the electronics could be reduced to a sigma of few adc channels (see Fig. 4) The peaks in the noise distribution are due to the geometry of the tracks on the front-end

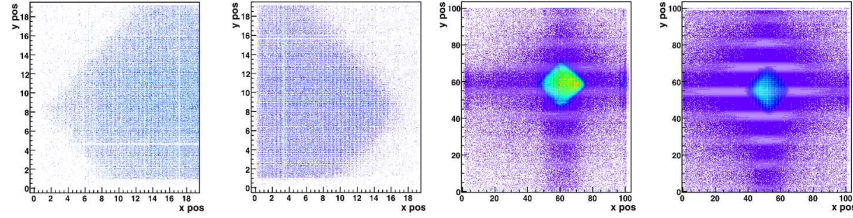


Fig. 2. Cluster hits of silicon strip detectors (left) and GEM detectors (right). Since the GEM2 is mounted downstream behind the TPC, the broadening of the distribution can be explained by multiple scattering. The geometry of the distributions is caused by the trigger scintillators.

card. For the main prototype the front end cards will get a different geometry to reduce this effects. The dips are caused by unconnected channels. Furthermore an alignment of the hole setup with photogrametry was done.

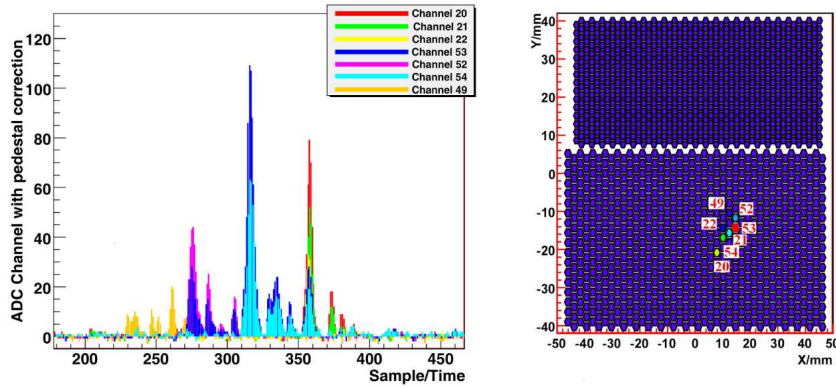


Fig. 3. On the left side the time structure of signals inside the test chamber are shown. All amplitudes are pedestal corrected. On the right side the corresponding pads are shown.

6. GEM-TPC Prototype

In parallel to the test with the small chamber, the construction of the prototype is ongoing. The first version of the padplane for the prototype has been finished and the connectors for the frontend cards were soldered on this padplane. A cooling device, the so called cooling-pot, has been

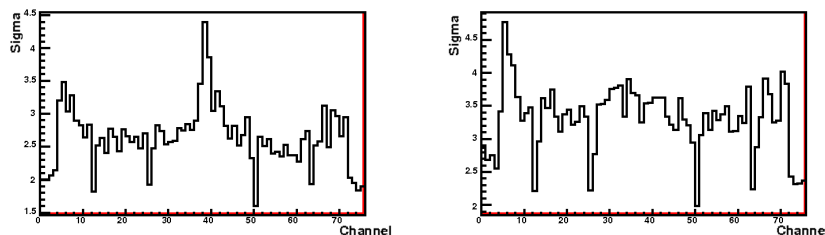


Fig. 4. Exemplary the sigma of the noise distribution for chips 10 and 11 versus channel number are shown. The peaks in the noise distributions are due to the track length and track position on the readout PCB. The dips are unconnected channels. In the future new frontend cards with shorter tracks will be used.

machined and tested. Furthermore a flange to distribute the gas, the low and the high voltage was build. The high voltage testing of the GEM foils is finished successfully and some of the foils are already glued onto frames to build the GEM stack.

7. Summary and Outlook

The beam telescope was commissioned successfully and tracks could be reconstructed. In the tests with the test chamber first tracks and also a beam profile was obtained. Lots of data for further analysis were taken. The construction of the prototype is ongoing and many parts are already produced and tested.

In April 2010 a test of the prototype at the FOPI spectrometer at the “Gesellschaft für Schwerionenforschung” (GSI) with a proton beam with 3.0 GeV kinetic beam energy is foreseen.

References

1. $\overline{\text{PANDA}}$, Technical progress report for panda GSI, (2005).
2. L. Ropelewski, B. Ketzer, S. Paul, F. Sauli and Q. Weitzel, *Nuclear Instruments and Methods A* **535**, 314 (2004).
3. L. Musa and e. al, *Nuclear Science Symposium Conference Record, 2003 IEEE* **5**, 3647 (2003).
4. L. Wörner, Performance studies of a tpc with gem readout using cosmic muons, Master's thesis, TU-München (2008).